



# NFC-3013

Eticheta NFC autoadeziva, rotunda, cu cip NXP NTAG213

## Imagine



YLI ETERNIT ACCES SRL  
A.: HAIDUCULUI 3A, CLUJ-NAPOCA  
T.: +40 264 484989  
W.: www.yli.ro

NFC-3013  
Eticheta NFC autoadeziva, rotunda,  
cu cip NXP NTAG213  
FISA TEHNICA

## Descriere

Eticheta NFC autoadeziva, rotunda, cu cip NXP NTAG213 reinspectibil, frecventa de functionare 13.56 MHz.


## Caracteristici

- Eticheta NFC autoadeziva
- Cip NXP MIFARE Ultralight (Ultralight C) - NTAG213, read/write
- **Cip reinspectibil**
- Format Wiegand 34
- Protocol anti-coliziune
- Protectie la scriere (parola)
- Parole pe 32 biti
- UID ASCII mirrors
- Contoare de 24 biti

## Specificatii

• Frecventa de operare:	13.56 MHz
• Viteza de transfer:	106 kbit/s
• Distanța de citire:	<100 mm (depinde de cititor)
• Serial number:	7 biti
• Capacitor:	50 pF
• Memorie:	180 biti organizata in 45 de pagini
• Memorie pentru scriere/citire:	137 biti
• Retinere date:	10 ani
• Material:	PVC
• Forma:	Rotunda
• Temperatura de operare:	-40 ~ +85 °C
• Culoare:	Rosu, negru
• Dimensiuni:	30(Ø) x 1(H) mm
• Greutate:	0.1 g

## Aplicatie

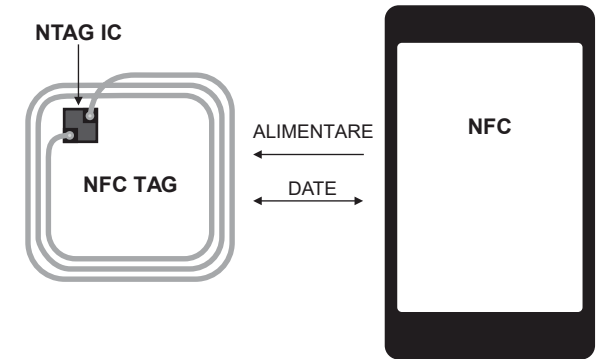

## Observatii



EEE FAC OBIECTUL UNEI  
COLECTARI SEPARATE

