



# NFC-3016

Eticheta NFC autoadeziva, rotunda, cu cip NXP NTAG216

## Imagine



## Descriere

Eticheta NFC autoadeziva, rotunda, cu cip NXP NTAG216 reinscriptibil, frecventa de functionare 13.56 MHz.


## Caracteristici

- Eticheta NFC autoadeziva
- Cip NXP MIFARE Ultralight (Ultralight C) - NTAG216, read/write
- **Cip reinscriptibil**
- Format Wiegand 34
- Protocol anti-coliziune
- Protectie la scriere (parola)
- Parole pe 32 biti
- UID ASCII mirrors
- Contoare de 24 biti

## Specificatii

- |                                  |                                       |
|----------------------------------|---------------------------------------|
| • Frecventa de operare:          | 13.56 MHz                             |
| • Viteza de transfer:            | 106 kbit/s                            |
| • Distanța de citire:            | <100 mm (depinde de cititor)          |
| • Serial number:                 | 7 biti                                |
| • Capacitor:                     | 50 pF                                 |
| • Memorie:                       | 924 bytes organizata in 231 de pagini |
| • Memorie pentru scriere/citire: | 888 bytes (222 pagini)                |
| • Retinere date:                 | 10 ani                                |
| • Material:                      | PVC                                   |
| • Forma:                         | Rotunda                               |
| • Temperatura de operare:        | -40 ~ +85 °C                          |
| • Culoare:                       | Albastru                              |
| • Dimensiuni:                    | 30(Ø) x 1(H) mm                       |
| • Greutate:                      | 0.1 g                                 |

## Aplicatie

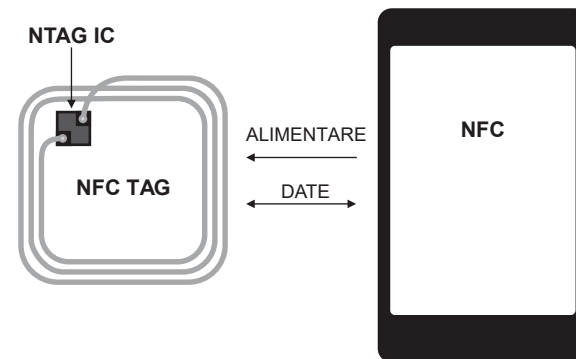

## Observatii



EEE FAC OBIECTUL UNEI  
COLECTARI SEPARATE

