




UTP7201GE-PSE60

Injector gigabit POE++ 60W, 802.3af/at, 10/100/1000Mbps

Imagine

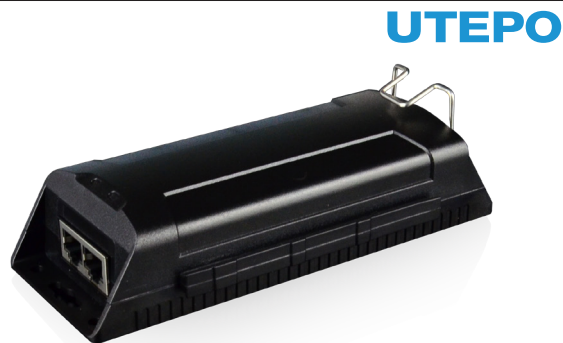

Descriere

Injector POE End-span si Mid-span pentru alimentarea dispozitivelor compatibile POE folosind cablul de date. Suporta conexiuni de date de pana la 1Gbps si o putere maxima de iesire de 60W (chip MAXIM) conform standard IEEE802.3af/at - POE++.

Caracteristici

- Sursa alimentare incorporata, 100 ~ 240Vca, 50/60Hz
- Distanța de transmisie de pana la 100m (CAT5e/6)
- POE++: 802.3at/af (54Vcc / 60W)
- Cip industrial
- Plug and Play
- Eficienta conversie pana la 90%
- Rata scazuta de disipare a caldurii
- Protectie la variatii mari de tensiune, ESD, interferente
- Fara ventilator, fara zgomot, rezistent la praf
- Montare pe perete sau pe birou, mai multe adaptoare pot fi unite

Specificatii

ALIMENTARE	Tensiune de alimentare	100 ~ 240Vac, 50/60Hz
POE++	Standard	IEEE 802.3at/af, I EEE 802.3 10Base-T/100Base-TX/IEEE802.3ab 1000Base-T
	Tip de alimentare	End-span, Mid-span
	Putere de iesire	54Vcc / 60W
	Asignare pini alimentare	Perechea: 1/2 (+), 3/6 (-) End-span Perechea: 7/8 (+), 4/5 (-) Mid-span
RETEA	Porturi retea	1xRJ45 IN / 1xRJ45 OUT
	Rata transmisie	10/100/1000Mbps
	Tipul cablului	Cat5/5e/6
	Distanța de transmisie	100m max.
INDICATORI STATUS	Indicator alimentare	1 LED rosu
	Indicator POE	1 LED galben
PROTECTIE	ESD	1a Descarcare la contact Nivelul 3 1b Descarcare prin aer Nivelul 3 8KV, Per: IEC61000-4-2
	Protectie la supratensiune	RETEA: 2KV (Mod diferential); 6KV (Comun) POE: 1KV (Mod diferential); 2KV (Comun) Per: IEC61000-4-5
MEDIU DE LUCRU	Temperatura de lucru	-10°C ~ +55°C
	Temperatura de depozitare	-40°C ~ +85°C
	Umiditate (fara condensare)	0-90%
CARACTERISTICI MECANICE	Dimensiuni	160(L) × 64(l) × 60(H)mm
	Carcasa	ABS
	Culoare	Negru
	Masa	0.20 kg
Stabilitate	MTBF	>30000h

YLI ETERNIT ACCES SRL
A.: HAIDUCULUI 3A, CLUJ-NAPOCA
T.: +40 264 484989
W.: www.yli.ro


UTP7201GE-PSE60
Injector gigabit POE++ 60W, 802.3af/at, 10/100/1000Mbps
FISA TEHNICA



Aplicatie


YLI ETERNIT ACCES SRL
 A.: HAIDUCULUI 3A, CLUJ-NAPOCA
 T.: +40 264 484989
 W.: www.yli.ro

UTP7201GE - PSE60
 Injector gigabit POE++ 60W, 802.3af/at, 10/100/1000Mbps
 FISA TEHNICA

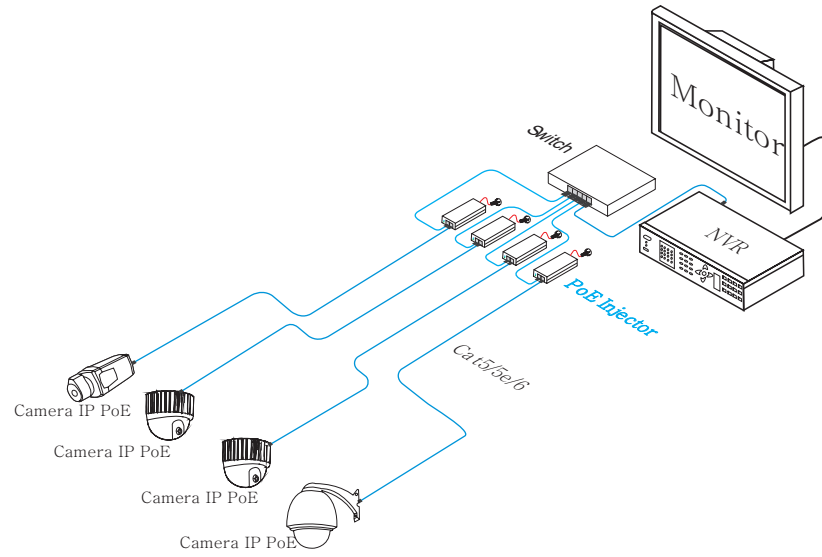


Parti si functii

Fata




Spate

Indicator intrare alimentare • Indicator iesire PoE



Baioneta

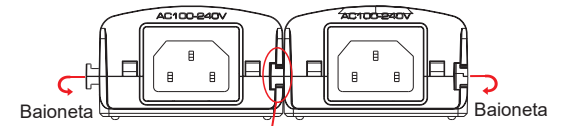

Conectare cu baioneta

Observatii



EEE FAC OBIECTUL UNEI
 COLECTARI SEPARATE

