



# ADDS-02/05.1

Actuator Dimming Slaver, 2 folds, 5A


## Caracteristici

- Actuator 2 canale cu dimmer
- Protectie la scurt-circuit si temperatura ridicata
- Control on/off lampa
- Dimming relativ
- Control intensitate luminoasa
- Transmitere status, erori
- 15 scene
- Functie cap scara cu indicator

## Specificatii

|                         |                                  |
|-------------------------|----------------------------------|
| • Alimentare:           | 230 Vca, 50/60 Hz                |
| • Putere maxima:        | 1000 W (500 W pe canal)          |
| • Consum:               | 5 W                              |
| • Tensiune de iesire:   | 230 Vca, 50/60 Hz (control faza) |
| • Iesiri:               | 2 canale                         |
| • Montare:              | Sina DIN 35 mm                   |
| • Temperatura de lucru: | -5 °C ~ +45 °C                   |
| • Dimensiuni:           | 144 (L) x 90(l) x 64(A) mm       |

## Aplicatie

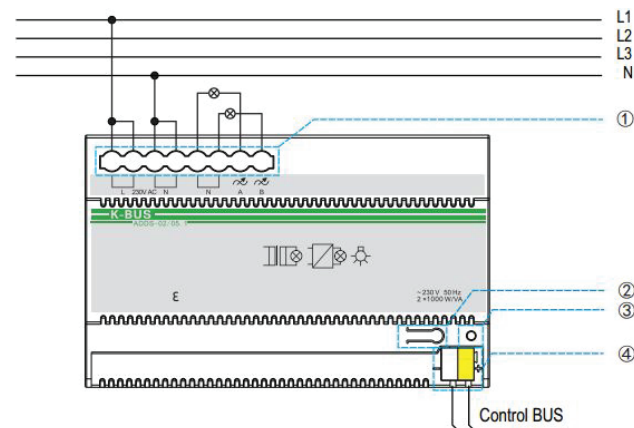

# KA/D 0400.1

Actuator Dimming Master, 4 folds


## Caracteristici

- Actuator 4 canale cu dimmer
- Control on/off lampa
- Dimming relativ
- Control intensitate luminoasa
- Transmitere status, erori
- 15 scene
- Functie cap scara cu indicator
- Preseturi, salvare preseturi, reset

## Specificatii

|                         |                           |
|-------------------------|---------------------------|
| • Alimentare:           | BUS: 21-30 Vcc            |
| • Consum:               | <12 mA, <360 mW           |
| • Alimentare auxiliara: | 100 ~240 Vca              |
| • Consum:               | <2.5 W                    |
| • Iesiri:               | 4 canale                  |
| • Montare:              | Sina DIN 35 mm            |
| • Temperatura de lucru: | -5 °C ~ +45 °C            |
| • Dimensiuni:           | 36 (L) x 90(l) x 64(A) mm |

## Aplicatie

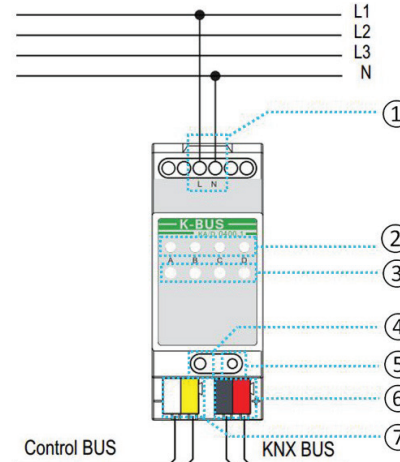

YLI ETERNIT ACCES SRL  
 A.: HAIDUCULUI 3A, CLUJ-NAPOCA  
 T.: +40 264 484989  
 W.: www.yli.ro

ADDS-02/05.1, KA/D 0400.1  
 FISA TEHNICA

## Observatii

EEE FAC OBIECTUL UNEI  
 COLECTARI SEPARATE

