



UOF7201GE

Convertor media cu un port SFP si port Ethernet

Imagie



UTEPO

YLI ETERNIT ACCES SRL
A.: HAIDUCULUI 3A, CLUJ-NAPOCA
T.: +40 264 484989
W.: WWW.YLI.RO

UTP7201GE
Convertor media cu un port SFP si port Ethernet
FISA TECHNICA

Descriere



Convertor media Gigabit, ce permite extinderea distantei de transmisie prin fibra optica. Poate fi folosit in orice sistem datorita portului SFP ce permite conectarea oricarui tip de modul de fibra optica.

Suporta conexiuni de retea 10/100/1000Mbps Ethernet si 1.25Gbps SFP. Folosit in aplicatii de supraveghere video IP, interfonie IP, retele de calculatoare, etc.


Caracteristici

- Port SFP 1.25Gbps si port retea 10/100/1000Mbps
- Foloseste modul optic SFP, suport hot-plug, distanta de transmisie in functie de modulul optic utilizat
- Compatibil cu standardele ethernet IEEE 802.3, IEEE 802.3u, IEEE 802.3ab/z
- Suporta 10/100/1000Mbps full/half duplex auto, MDI/MDIX auto
- Protectie excelenta la descarcari electrostatice, protectie antistatica si anti-interferente
- LED status dinamic, ce ofera date in timp real despre status si informatii pentru depanare
- Carcasa MIT compacta, instalare in rack MIT sau pe perete

Specificatii

ALIMENTARE	Tensiune de alimentare	12-24Vcc (sursa inclusa)
	Consum maxim	<5W
PORT ETHERNET	Porturi ethernet	10/100/1000Mbps Base-T
	Distanta de transmisie	0-100m
PORT FIBRA	Port fibra	LC, SFP, Single Fiber sau Dual Fiber
	Latime de banda	1.25Gbps
	Distanta de transmisie	Depinde de performantele modulului SFP
STANDARD	Standart Ethernet	IEEE802.3, IEEE802.3u, IEEE802.3ab/z, 10/100/1000Mbps Base-T si 1000Mbps Base-X, IEEE802.3X
INDICATORI STATUS	Indicator alimentare	1 x LED rosu
	Indicatori SFP	3 x LED verde (Link, SD, FED)
	Indicatori Ethernet	1 x LED verde
PROTECTIE SUPRATENSIEUNE	Sursa de alimentare	6KV, IEC1000-4-5
	ESD	Descarcare la contact: 6KV Descarcare prin aer: 8KV IEC61000-4-2
MEDIU DE LUCRU	Temperatura de lucru	-40°C ~ +75°C
	Temperatura de depozitare	-40°C ~ +85°C
	Umiditate (fara condensare)	0 ~ 95%, fara condensare
CARACTERISTICI MECANICE	Dimensiuni	103(L) x 82(l) x 25(A) mm
	Carcasa	Metal
	Culoare	Negru
	Masa bruta	0.16 kg

Parti si functii

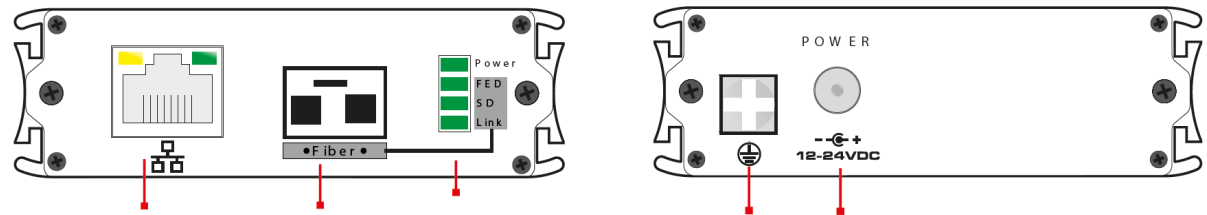

Port Ethernet Port SFP LED Status


Terminal Alimentare Alimentare

ATENIE!!!

Este obligatorie conectarea bornei de impamantare a echipamentului!



Aplicatie

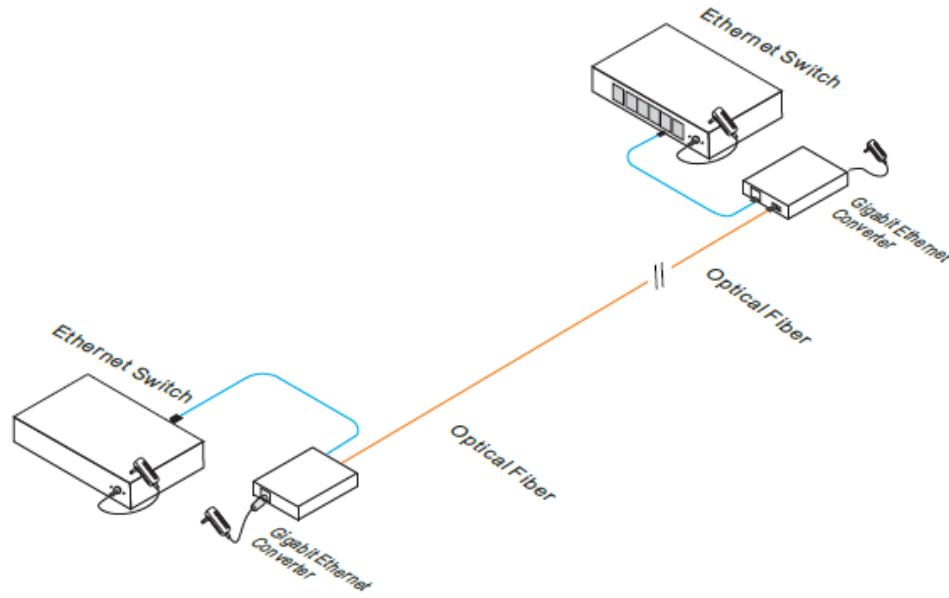


Continut pachet

- Convertor media 1 buc.
- Sursa alimentare 12Vcc/1A 1 buc.
- Cablu alimentare 1 buc.
- Accesorii montare 1 set
- Manual de utilizare 1 buc.

YLI ETERNIT ACCES SRL
 A.: HAIDUCULUI 3A, CLUJ-NAPOCA
 T.: +40 264 484989
 W.: www.yli.ro

Dimensiuni

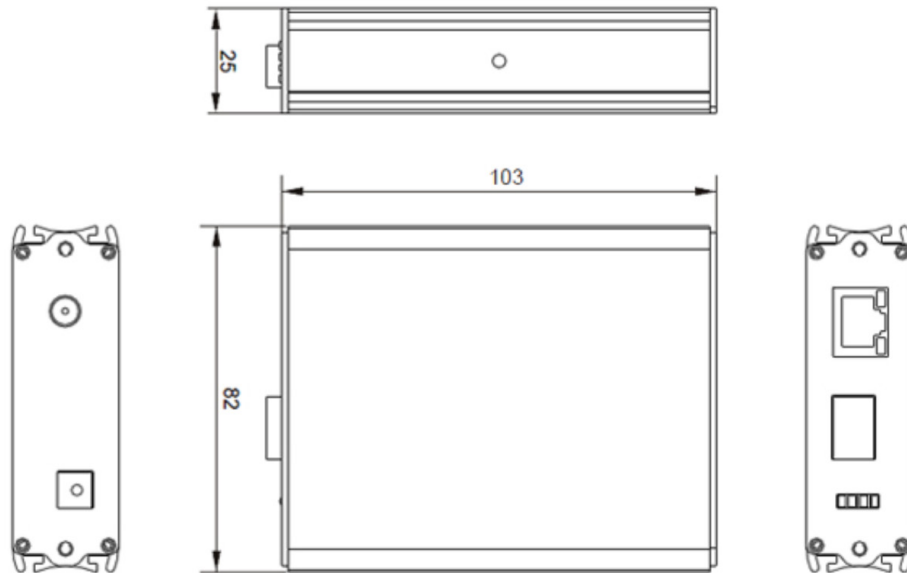

UTP7201GE
 Convertor media cu un port SFP si port Ethernet
FISA TEHNICA

Observatii



EEE FAC OBIECTUL UNEI
 COLECTARI SEPARATE

