




YLI ETERNIT ACCES SRL
A.: HAIDUCULUI 3A, CLUJ-NAPOCA
T.: +40 264 484989
W.: www.yli.ro

YK-TT-READ
Cititor de proximitate RFID 125kHz,
format iesire Wiegand 26
FISA TEHNICA

YK-TT-READ

Cititor de proximitate RFID 125kHz, format iesire Wiegand 26

Imagine

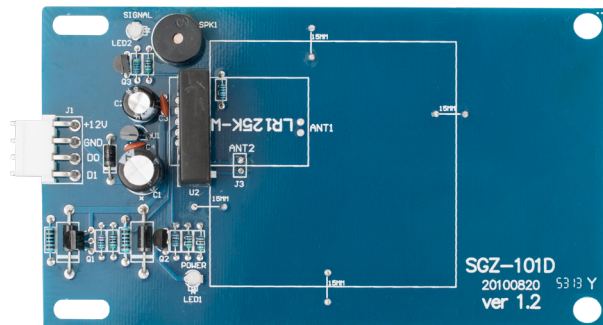

Descriere

YK-TT-READ este un cititor de proximitate RFID 125kHz, placa montare in turnichet. Functioneaza cu cartele/ taguri EM 125kHz cu cip EM4100. Format iesire Wiegand 26.

Caracteristici

- Indicator LED si buzzer
- Format iesire Wiegand 26
- Consum redus de energie
- Performanta crescuta
- Posibilitate montare in turnichet

Specificatii

- | | |
|--------------------------------|---------------------|
| · Tensiune de alimentare: | 12 Vcc |
| · Consum: | <60 mA |
| · Cartele/ taguri compatibile: | RFID EM 125 kHz |
| · Distanta de citire: | 3 ~ 5 cm |
| · Timp de citire: | ≤300 ms |
| · Format iesire: | Wiegand 26 |
| · Temperatura de functionare: | -10°C ~ +45°C |
| · Umiditate: | 10% ~ 85% |
| · Dimensiuni: | 13.5(L) x 7.7(l) mm |
| · Masa bruta: | 0.1 kg |

Conexiuni

- | | |
|--------|-------------------|
| · +12V | Alimentare +12Vcc |
| · GND | GND |
| · D0: | Wiegand Data 0 |
| · D1: | Wiegand Data 1 |

Observatii



EEE FAC OBIECTUL UNEI
COLECTARI SEPARATE

