


SVT-0401

Inregistrator video digital
4 canale, tribrid



CARACTERISTICI

DVR Tribrid 4 canale

Suporta camere HD-TVI 720P/960/1080P, camere SD 400-1200TVL si camere IP pana la 6MP

Funcție P2P usor de utilizat, configurare telefon cu cod QR

Suport cloud Google Drive, Dropbox (permite salvarea capturilor de imagine)

Inregistrare in format 720P la 30 FPS pe canal, 1080P la 15 FPS pe canal

Suporta un HDD de pana la 4TB

Playback timp-real 2/4 canale

Interfata prietenoasa cu pictograme

Suporta captura de poze, blocarea/taierea inregistrarilor, backup in format AVI


Suporta conectare la retele 3G si WiFi cu adaptor USB

Suporta HDD SMART pentru raportarea erorilor de HDD


Suporta iesire video HDMI/VGA/BNC simultan

Suporta CMS, Web View si Mobile View (cu functie de playback a inregistrarilor de pe DVR)

Suport PPPoE, UPNP, DHCP, DDNS, FTP, NTP, Alerta e-mail

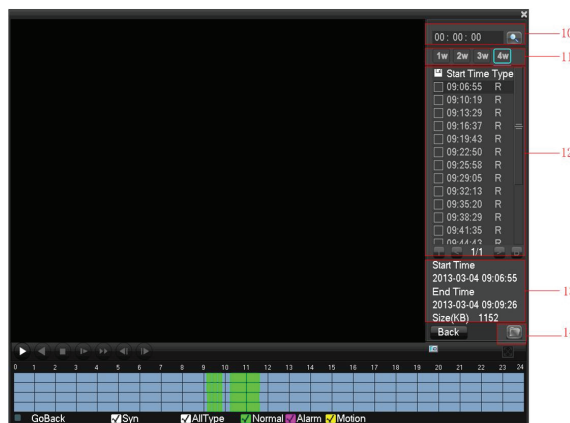

INTERFATA DE CONTROL SI COMUNICATIE

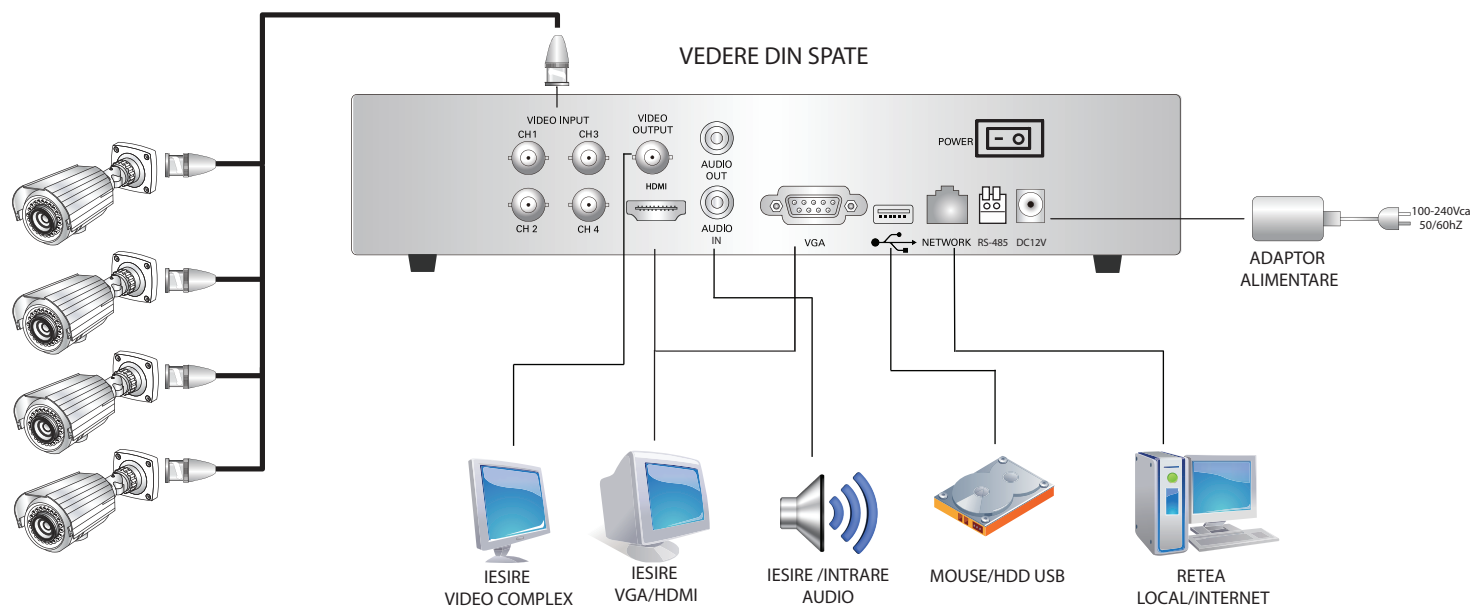

Fisa tehnica




YLI ETERNIT ACCES Srl

A.: Str. Haiducului 3A
400040 Cluj-Napoca
Romania

T.: 004 0264 484 989
F.: 004 0364 262 990
W.: www.yli.ro

SVT-0401

Inregistrator video digital 4 canale, tribrid

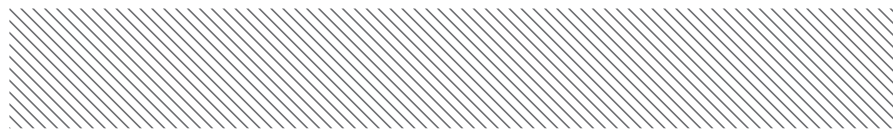

DETALII TEHNICE

Carcasa	Mini 1U	
Sistem de operare	Embedded LINUX	
Video	Compresie	H.264 Main Profile@Level 4.1
	Intrari	4 conectori BNC (1.0Vp-p, 75ohmi) , TVI suporta Coaxitron
	Iesiri	BNC + VGA + HDMI (1920 x 1080)
	Stream dual	Suporta
Vizualizare	Local	1080P(25/30fps),720P(25/30/50/60fps), 960H/ D1
	La distanta	1080P/720P/960H/D1/CIF
Inregistrare	Rata frame-uri (FPS)	1080P 15FPS pe canal/ 720P 30FPS pe canal/ 960H 25FPS/ D1 25FPS
	Mod inregistrare	Manual, Programat, la Miscare, la Alarma
	Pre-inregistrare	5-30 sec
	Bitrate	Ajustabil/ Fix sau Variabil
	Calitate	6 nivele selectabile pe fiecare canal in parte
	Rezolutie	1080P/720P/ 960H/ D1
Playback	Calitate	4 canale 1080P@15FPS/ 4 canale 720P@30FPS/ 4 canale 960H simultan
	Mod cautare	Dupa Timp (Time Line) , Data, Mod inregistrare, Evenimente, Cautare Smart
Management	Local	Mouse, Panou frontal, telecomanda
	La distanta	CMS gratuit si browser web (Internet Explorer, Chrome, Firefox, Safari)
	Utilizatori	Organizati in grupuri de securitate / Permisuni locale sau la distanta Posibilitatea selectarii canalelor pe care utilizatorul are drepturi
Alarma e-mail	Suporta orice server SMTP / Suporta alerta cu poza atasata / Secure SMTP / E-mail test	
Mobil	Suporta iPhone, iPad, Android, Blackberry, Windows Mobile - client P2P	
Backup	Pe dispozitive USB, in retea. Suporta backup rapid in timpul playback-ului. Backup in format AVI sau DAT	
HDD	1 HDD (Max 4TB) - tehnologie de hibernare disc, alerta disc defect	
Interfete externe	Interfata retea	RJ45 10M/100M
	Funcții retea	FTP, PPPoE, DDNS, E-Mail, UPNP, NTP, P2P, 3G, WiFi, RTSP
	Interfata USB/ RS-485	2 porturi(Mouse, Backup, 3G - modem Huawei)/Standard RS-485, PTZ
General	Dimensiuni	320mm × 245mm × 50mm (W×D×H); Greutate 2KG (fara HDD)
	Alimentare	220±30% V,50±3% Hz / 110±20% V,60±3% Hz / 12Vcc, 2A
	Consum de energie (fara HDD)	8W



Fisa tehnica

2