



YS-150NC(L)-V2

Incuietoare electromagnetica incastrabila cu monitorizare, Fail-Safe

Imagine



YLI ETERNIT ACCES SRL
A: Haiducului 3A
T: 0040-264-484989
W: www.yli.ro

YS-150NC(L)-V2
Incuietoare electromagnetica incastrabila cu monitorizare, Fail-Safe
FISA TEHNICA

Descriere

Este o incuietoare electromagnetica incastrabila, Fail-Safe, cu monitorizare.

Particularitatea incuietorii o reprezinta functia de monitorizare (NO-COM-NC), aceasta functie permite integrarea facila a incuietorii in sistemele de alarma, contol acces, incendiu etc.

Caracteristici

- Mod functionare: Fail-Safe
- Monitorizare (NO, COM, NC): Da
- Montare reversibila: Da
- Aplicabilitate: Usi de lemn, metal, PVC


Specificatii

- Tensiune de alimentare: 12Vcc
- Curent absorbit: 130mA
- Sarcina max. pe releu: 1A/30Vcc
- Forta de retinere: 500kgf
- Durata de viata: 100.000 deschideri
- Mod de deschidere: Piedica basculanta 45 de grade
- Temperatura de functionare: -10°C ~ +55°C
- Umiditate: 0~90% (fara condensare)
- Dimensiuni incuietoare: 90(L) x 31(l) x 21(A)mm
- Dimensiuni suport: 250(L) x 25(l) x 3(A)mm
- Montare: Incastrata
- Material: Aliaj de zinc
- Masa bruta: 0.3kg

Monitorizare

- Alb: COM
- Galben: NC
- Albastru: NO

Dimensiuni

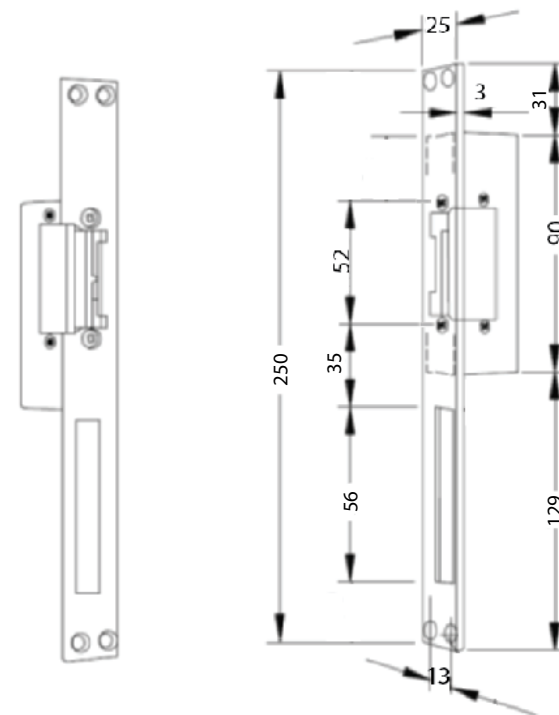

Observatii



EEE FAC OBIECTUL UNEI
COLECTARI SEPARATE

