

8-Port 100Mbps and 2-Port Gigabit Easy Cloud Managed PoE Switch



Product Highlights

- 8*100Mbps PoE ports and 2*1Gbps uplink RJ45 ports
- Comply with IEEE 802.3, IEEE 802.3u, and IEEE 802.3x standards
- Ethernet Ports support 10/100Mbps self-adaptive
- Flow control method: Full duplex uses IEEE 802.3x standard, while half duplex uses Back pressure standard
- Support PoE watchdog
- Port 1 supports HiPoE 60W
- Support automatic port flipping (Auto MDI/MDIX)
- The panel indicator LEDs will monitor the working status and assist in fault analysis
- Support device positioning, enable device positioning, the uplink port of the switch will flash, making it easier for users to find it

Hardware Features

Description	Specification
Model	HR110P-8T2GT-120
Interface	8*100Mbps PoE ports 2*1Gbps uplink RJ45 ports
Port Standard	IEEE802.3 (Ethernet) IEEE802.3u (Fast Ethernet) IEEE802.3x (Flow Control)
Switching Bandwidth	5.6Gbps
Packet Forwarding Rate	4.166Mpps
Packet Buffer	1Mbit
MAC Address Table	2K
Transmission Method	Store and Forward
PoE Standard	IEEE802.3af (15.4W) IEEE802.3at (30W)
PoE Port Output Voltage	DC 44-57V
PoE Ports	Port 1 supports HiPoE 60W Ports 2-8 PoE power output <30W
PoE Power Budget	110W
Surge Protection	Port Surge: Common mode 4KV, Differential mode 2KV (Class B) Electrostatic ESD: Air 8KV, Contact 6KV (Class B)
Operating Temperature	0~40°C
Storage Temperature	-40~70°C
Operation Humidity	10%~90%, non condensing
Storage Humidity	5%~95%, non condensing
Power Supply	AC 100-240V 50/60Hz DC 52V 1.92A


Hardware Features

Description	Specification
Mainboard Power Consumption	3.7W
Structure Information	Product Dimensions: 200*118*44mm Packaging Dimensions: 245*160*55mm Product Net Weight: 0.64KG Product Gross Weight: 0.73KG
Packing Information	Carton Dimensions: 520*300*340mm Packing Quantity: 20PCS Packing Weight: 15.6KG
Package Contents	Switch 1pcs, Power Cord 1pcs, Manual 1pcs, Certificate of Inspection 1pcs
Fan Quantity	0
Installation	Desktop
PWR Green LED	On: Powered on Off: Powered off
Ports 1-8 Green LED	On: 10/100Mbps Link normal Off: Link blocked Flashing: Data transmitting
Ports 9-10 Green LED	On: 10/100/1000Mbps Link normal Off: Link blocked Flashing: Data transmitting

Software Features


Description	Specification
Information	
Info	
Port	Port Alias Port Statistics Extend
PoE	Restart Off
Setting	Positioning VLAN PoE Watchdog PoE Priority
Management	System restart Software update

Product Structure Diagram

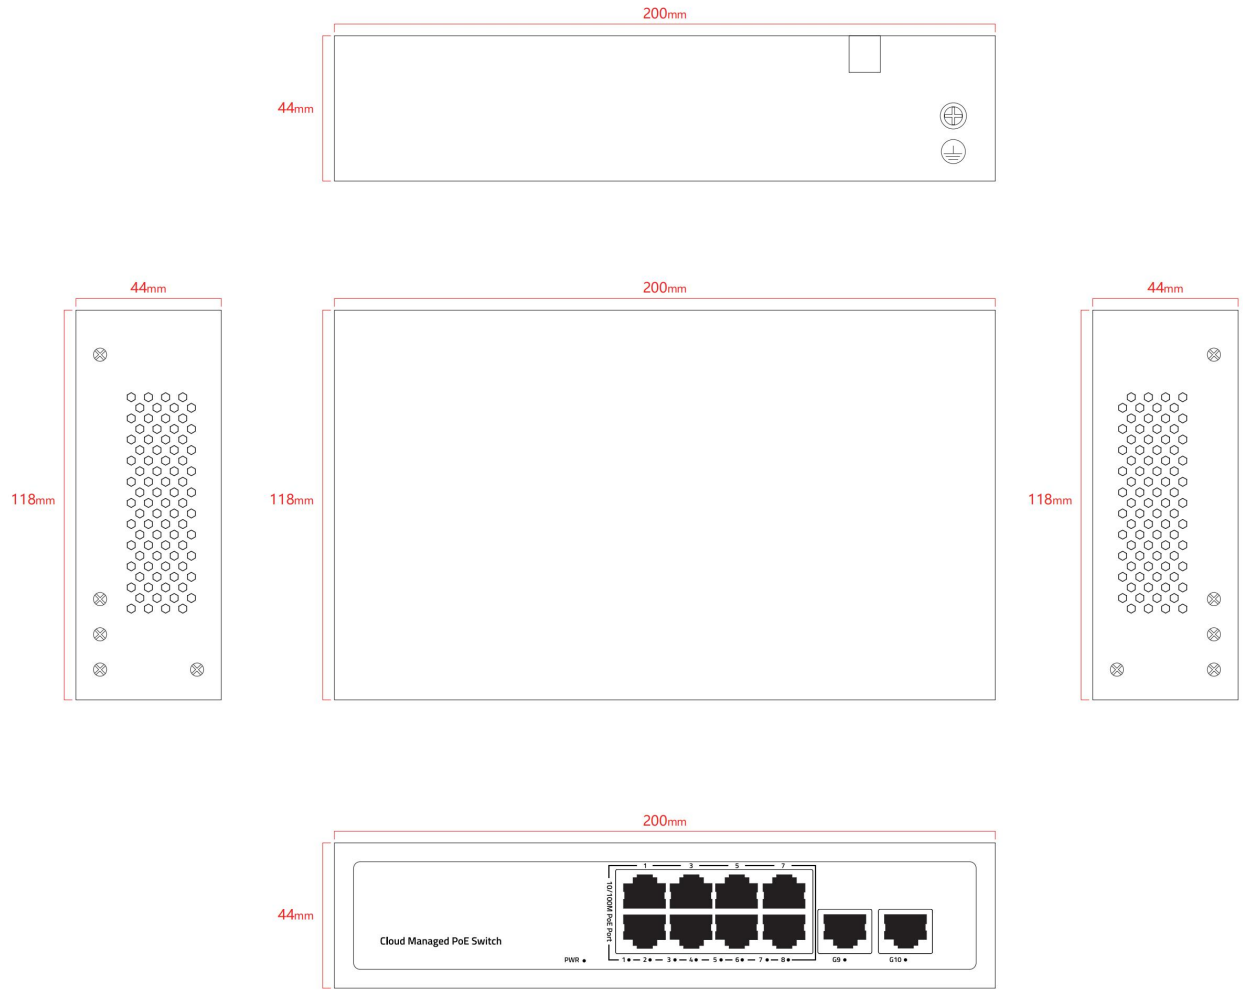

Mounting ear diagram (Optional, support customization, default no mounting ear)
 Unit of size: mm

Wall mounted ears

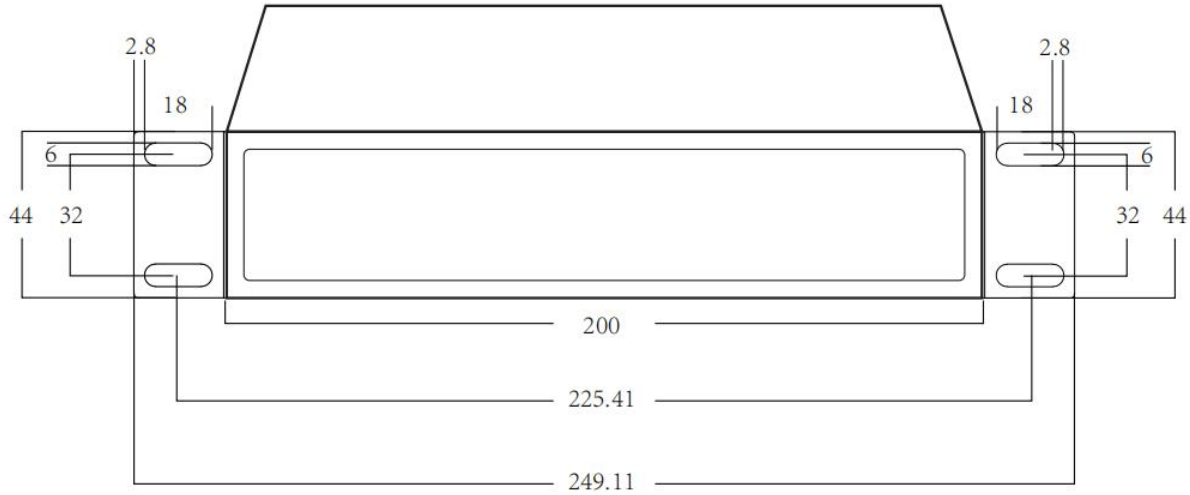

Rack mounting ears

