



YLI ETERNIT ACCES srl
A.: HAIDUCULUI 3A, CLUJ-NAPOCA
T.: +40 264 484989
W.: www.yli.ro

PB-19-NONC(LED)-RDGN
Buton de iesire, contacte NO/NC, LED rosu/verde, filet
M19, actionare prin apasare
FISA TEHNICIA

PB-19-NONC(LED)-RDGN

Buton de iesire, contacte NO/NC, LED rosu/verde, filet M19, actionare prin apasare

Imagine



Descriere

PB-19-NONC(LED)-RDGN este un buton cu suprafata proeminenta, contacte NO/NC si LED bicolor rosu/verde. Este destinat montajului incastrat intr-un orificiu cu diametrul de 19 mm, conectarea firelor se face prin lipire. Suprafata de actionare are protectie IP65 impotriva apei si prafului.

In cazul instalarii la exterior, zona conexiunilor electrice din partea din spate trebuie protejata corespunzator.


Caracteristici

- Buton cu actionare prin apasare
- Material: metal si ABS
- Instalare: Incastrat
- Tip conexiune: lipire
- Culori LED disponibile: rosu/verde


Specificatii tehnice

- Alimentare: 12 Vcc
- Consum: 10 mA
- Sarcina maxima: 2 A la 36 Vcc
- Protectie intemperii: IP65, pentru suprafata butonului
- Dimensiuni: $\varnothing 22 \times 44$ mm
- Greutate bruta: 18 g
- Temperatura de functionare: -30°C pana la $+55^{\circ}\text{C}$
- Umiditate admisa, fara condens: maximum 95%
- Durata de viata: aproximativ 500.000 de actionari
- Dimensiune de montaj: $\varnothing 19 \times 39$ mm

Conexiuni electrice

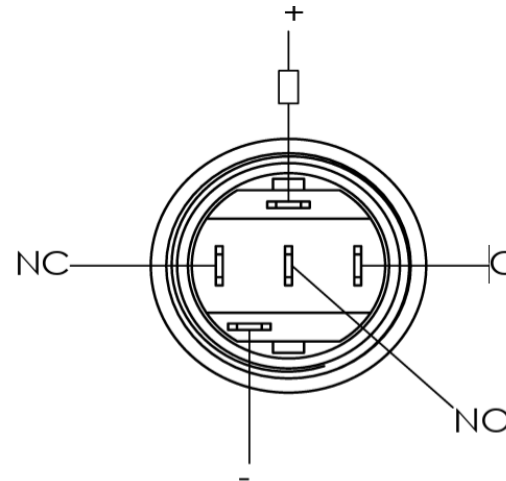

Dimensiuni

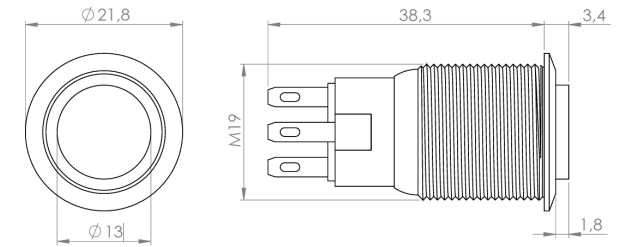

Observatii



EEE FAC OBIECTUL UNEI
COLECTARI SEPARATE

