



UTP101P-HD

Balun video HD pasiv cu protectie si bloc terminal tip "push"

Imagine

UTEPO



YLI ETERNIT ACCES SRL
A.: HAIDUCULUI 3A, CLUJ-NAPOCA
T.: +40 264 484989
W.: www.yli.ro

UTP101P-HD
Balun video HD pasiv cu protectie si bloc terminal tip "push"
FISA TEHNICA

Descriere

Balun video HD pasiv pentru sistemele de supraveghere video analogice HD cu protectie si bloc terminat de tip "push". Protectie la supra tensiune pe cablu coaxial 2 kV. Compatibil cu sistemele: HDTV, AHD, HDCVI, analog SD.


Caracteristici

- Nu necesita alimentare
- Transmite in timp real semnal video 720P / 1080P
- Transferul unui canal video HD prin cablu UTP CAT5e/6
- Protectie la supratensiuni, descarcari electrostatice

Specificatii

- Canale transmisie: 1 canal video
- Conector video: BNC/Bloc terminal rapid (push)
- Distanța transmisie: 370 m HDCVI 720P
200 m HDCVI 1080P
200 m HDTV 720P
200 m HDTV 1080P
330 m AHD 720P / 960P
300 m AHD 1080P
400 m Analog Video
- Formate compatibile: HDCVI, AHD, HDTV, analog SD
- Latime de banda semnal: 0-70 MHz
- Protectie supratens. coaxial: 2 kV, per IEC 61000-4-5
- Protectie supratensiune UTP: 2 kV, per IEC 61000-4-5
- Impedanta: BNC 75 ohm
UTP 100 ohm
- Durata medie de viata: > mai mult de 10000 h
- Temperatura de lucru: - 10 °C ~ 55 °C
- Temperatura de stocare: - 40 °C ~ 85 °C
- Umiditate: 0-95% (fara condens)
- Material: ABS, Negru
- Lungime cablu BNC: 12 cm
- Dimensiuni: 35(L) x 19(l) x 15(H) mm
- Greutate: 23 g

Aplicatie

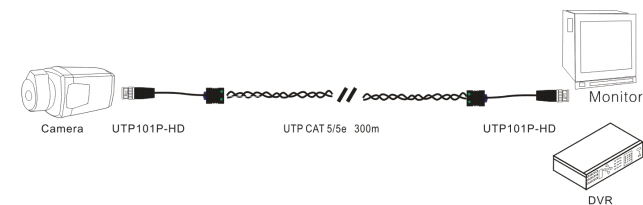

Observatii



EEE FAC OBIECTUL UNEI
COLECTARI SEPARATE