




EA-66MF

Cititor de proximitate fara carcasa, MIFARE 13.56MHz

YLI ETERNIT ACCES srl
A.: HAIDUCULUI 3A, CLUJ-NAPOCA
T.: +40 264 484989
W.: www.yli.ro

EA-66MF
Cititor de proximitate fara carcasa, MIFARE 13.56MHz
FISA TEHNICA

Imagine

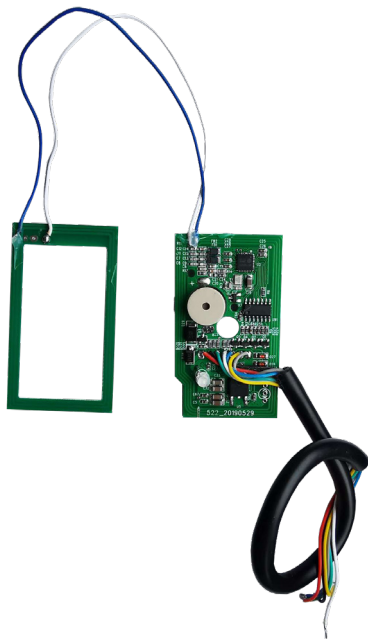

Descriere

EA-66MF este un cititor wiegand fara carcasa, cu o antena, ce functioneaza cu cartele de proximitate MF 13.56MHZ . Particularitatea sa o reprezinta forma de mici dimensiuni si lipsa carcasei, putand fi integrat cu usurinta in diverse echipamente sau aplicatii ce necesita un cititor Wiegand Mifare.

Specificatii tehnice

•Cartele compatibile:	Mifare 13.56 MHz
•Alimentare:	+9 - 16Vcc
•Consum:	≤80mA
•Conectivitate:	Wiegand 26/ 34 ajustabil
•Distanta citire:	≤5cm
•Led stare:	Da
•Buzzer:	Da
•Dimensiuni PCB:	60(L) x 34(l) [mm]
•Dimensiuni antena:	61(L) x 34(l) [mm]
•Temperatura:	-20°C-70°C
•Umiditate:	10%-90%
•Masa:	20 g

Conexiuni

•Rosu:	+9 - 16Vcc
•Negru:	GND
•Verde:	D0 (Iesire Wiegand)
•Alb:	D1 (Iesire Wiegand)
•Albastru:	Led
•Galben:	Buzzer
•Gri:	Format iesire W26/ W34 (conectare la GND)

Observatii



EEE FAC OBIECTUL UNEI
COLECTARI SEPARATE

