


SVT-0400

Inregistrator video digital
4 canale HD-TVI 1080P/720P



CARACTERISTICI

TVR 4 canale HD-TVI 720P/1080P

Funcție P2P usor de utilizat, configurare telefon cu cod QR

Suport cloud Google Drive, Dropbox (permite salvarea capturilor de imagine)

Inregistrare in format 720P la 30 FPS pe canal si 1080P la 15 FPS pe canal

Suporta un HDD de pana la 4TB

Playback timp-real 2/4 canale

Interfata prietenoasa cu pictograme

Suporta captura de poze, blocarea/taierea inregistrarilor, backup in format AVI

Suporta conectare la retele 3G si WiFi cu adaptor USB


Suporta HDD SMART pentru raportarea erorilor de HDD

Suporta iesire video HDMI/VGA/BNC simultan

Suporta CMS, Web View si Mobile View (cu functie de playback a inregistrarilor de pe TVR)

Suport PPPoE, UPNP, DHCP, DDNS, FTP, NTP, Alerta e-mail

INTERFATA DE CONTROL SI COMUNICATIE

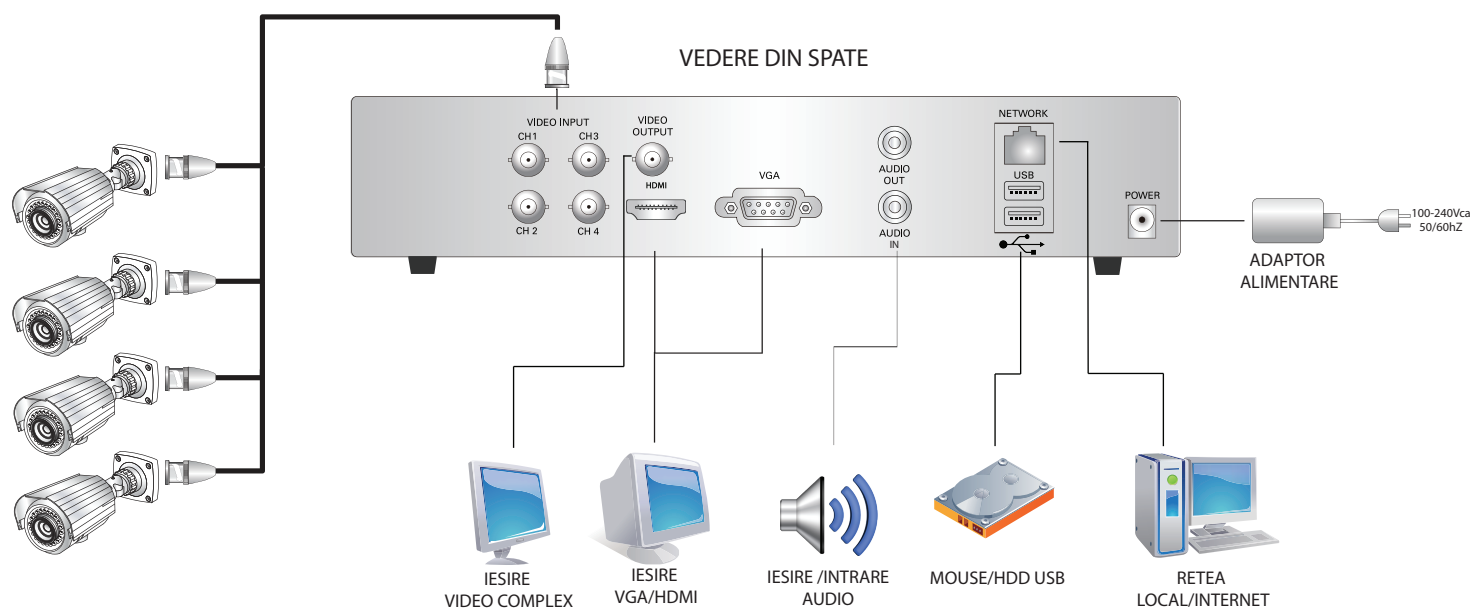

Fisa tehnica




YLI ETERNIT ACCES Srl

A.: Str. Haiducului 3A
400040 Cluj-Napoca
Romania

T.: 004 0264 484 989
F.: 004 0364 262 990
W.: www.yli.ro


SVT-0400

Inregistrator video digital
4 canale HD-TVI 1080P/720P

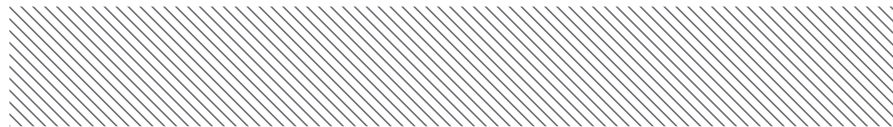

DETALII TEHNICE

Carcasa	Metal	
Sistem de operare	Embedded LINUX	
Video	Compresie	H.264
	Intrari	4 conectori BNC (1.0Vp-p, 75ohmi) , TVI 1080P, TVI suporta Coaxitron
	Iesiri	BNC + VGA + HDMI (1920 x 1080)
	Stream dual	Suporta
Vizualizare	Local	720P(25/30/50/60fps)/1080P(25/30fps)
	La distanta	720P/1080P
Inregistrare	Rata frame-uri (FPS)	720P 30FPS pe canal/ 1080P 15FPS pe canal
	Mod inregistrare	Manual, Programat, la Miscare, la Alarma
	Pre-inregistrare	5-30 sec
	Bitrate	Ajustabil/ Fix sau Variabil
	Calitate	6 nivele selectabile pe fiecare canal in parte
	Rezolutie	1080P/720P
Playback	Calitate	4 canale 1080P@15FPS sau 4 canale 720P@30FPS simultan
	Mod cautare	Dupa Timp (Time Line) , Data, Mod inregistrare, Evenimente, Cautare Smart
Management	Local	Mouse
	La distanta	CMS gratuit si browser web (Internet Explorer, Chrome, Firefox, Safari)
	Utilizatori	Organizati in grupuri de securitate / Permisuni locale sau la distanta Posibilitatea selectarii canalelor pe care utilizatorul are drepturi
Alarma e-mail	Suporta orice server SMTP / Suporta alerta cu poza atasata / Secure SMTP / E-mail test	
Mobil	Suporta iPhone, iPad, Android, Blackberry, Windows Mobile - client P2P	
Backup	Pe dispozitive USB, in retea. Suporta backup rapid in timpul playback-ului. Backup in format AVI sau DAT	
HDD	1 HDD (Max 4TB) - tehnologie de hibernare disc, alerta disc defect	
Interfete externe	Interfata retea	RJ45 10M/100M
	Functii retea	FTP, PPPoE, DDNS, E-Mail, UPNP, NTP, P2P, 3G, WiFi, RTSP
	Interfata USB	2 porturi(Mouse, Backup, 3G - modem Huawei)
General	Dimensiuni	215mm x 235mm x 45mm (WxDxH)
	Alimentare	220±30% V,50±3% Hz / 110±20% V,60±3% Hz / 12Vcc, 2A
	Consum de energie (fara HDD)	7W

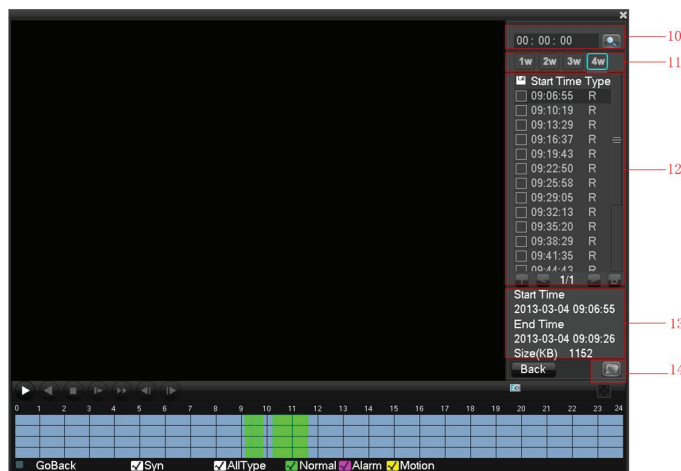

Fisa tehnica



YLI ETERNIT ACCES Srl

A.: Str. Haiducului 3A
400040 Cluj-Napoca
Romania

T.: 004 0264 484 989
F.: 004 0364 262 990
W: www.yli.ro