



GNT-5313AB

Splitter PoE 802.3af/at

Imagine



YLI ETERNIT ACCES srl
A.: HAIDUCULUI 3A, CLUJ-NAPOCA
T.: +40 264 484989
W.: www.yli.ro

Descriere

GNT-5313AB este un splitter PoE pentru sisteme CCTV, care permite conectarea a doua echipamente IP PoE folosind un singur cablu de retea.

Suporta standardele IEEE 802.3i, IEEE 802.3u si IEEE 802.3af/at, transmisie pana la 130m, si protectie la descarcari de 6 kV si ESD 8 kV.

GNT-5313AB
Splitter PoE 802.3af/at
FISA TEHNICA

Caracteristici


- Permite conectarea a doua camere IP PoE printr-un singur cablu UTP
- Reduce costurile de cablare si simplifica instalarea sistemelor CCTV
- Compatibil cu standardele PoE IEEE 802.3af/at
- Suporta transmisie date 10/100 Mbps
- Distanța de transmisie de pana la 130 m
- Putere maxima totala 60W
- Echipat cu protectie la descarcari electrice 6 kV
- Protectie ESD 8 kV
- Format compact, usor de integrat in instalatii existente
- Potrivit pentru camere IP PoE, sisteme CCTV si aplicatii de supraveghere video.

Specificatii


- | | |
|-------------------------|--|
| • Viteza date: | 10/100 Mbps |
| • Standard retea: | IEEE 802.3i 10BASE-T
IEEE 802.3u 100BASE-TX |
| • Standard PoE: | IEEE 802.3af/at |
| • Porturi: | RJ45 |
| • Porturi PoE: | 2 iesiri PoE |
| • Distanța transmisie: | pana la 130 m |
| • Tensiune intrare: | max. 57 VDC |
| • Putere maxima: | 60W |
| • Alimentare PoE: | 1/2 +52V, 3/6 GND |
| • Protectie descarcari: | 6 kV, IEC61000-4-5 |
| • Protectie ESD: | 8 kV, IEC61000-4-2 |
| • Temperatura de lucru: | -30°C - +60°C |
| • Dimensiuni modul AL | 180 x 20 mm |
| • Greutate modul A: | 0.05 kg |
| • Dimensiuni modul B: | 42 x 38 x 15 mm |
| • Greutate modul: B | 0.05 kg |

Dimensiuni


Modul A

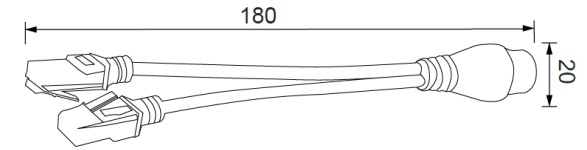

Modul B



Aplicatie

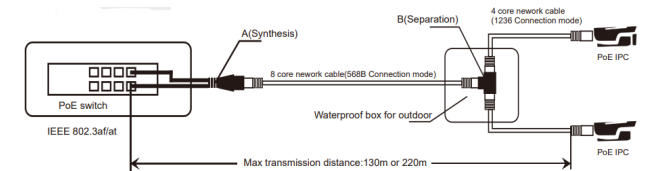

Observatii



EEE FAC OBIECTUL UNEI
COLECTARI SEPARATE

